

Lift-TEX® Industrie B.V. - Coil Lifting Sling



EXTREEMA® Synthetic coil lifting slings and coil handling slings made from HMPE (Dyneema®).



Lifting capacity: from W.L.L. 10T up to W.L.L. 40T per coil in a U-lift.

Length: from 1 meter up to 60 meters working length.



Stevedoring companies, transportation and steel companies are already familiar with the considerable cost saving and efficiency improving innovative EXTREEMA® coil lifting slings.

- 100% Dyneema® (HMPE)
- Extremely Low weight (8 to 10 times lighter than steel)
- Extremely flexible and soft, easy to handle
- Extremely small diameter
- Extremely low elongation (less 1% at W.L.L!)
- Extremely high cut resistance
- Extremely high abrasion resistance
- Extremely good puncture resistance
- Extremely high resistance to UV exposure
- Good resistance to chemicals
- Does not absorb water
- Less back & hand injuries, increased efficiency
- Cost saving, long service life.
- Repairable Sling (contact manufacturer for more details).
- No scrap, no damage to coil.
- Proofload of sling on demand.(DNV, Lloyds Register,etc.)

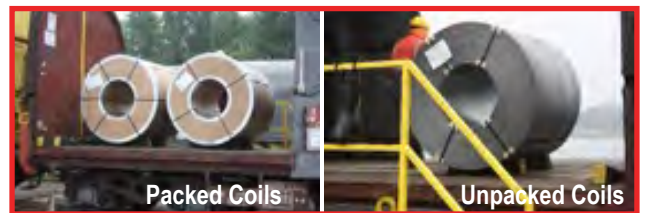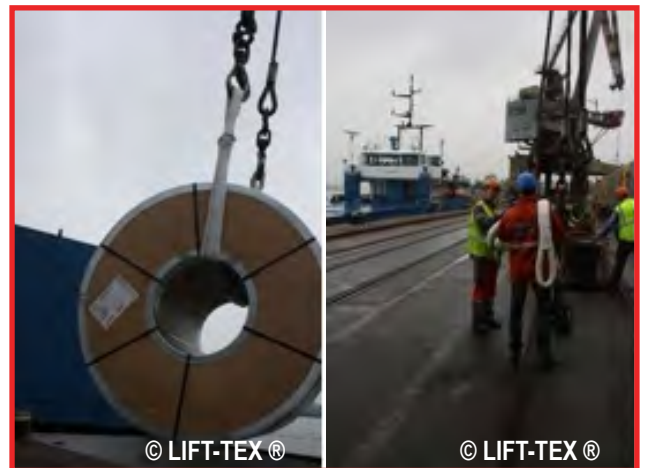

Always inform your supplier exactly about the packing conditions and protections on the product. In case of any doubt contact LIFT-TEX® for more detailed advise and instructions for use of the proper type of sling & extra protections!

Extra protections and sleeves can be added on demand. Slings and protections are available in several configurations, contact LIFT-TEX® for more details about a suitable solution.

Always read user's instructions before use of LIFT-TEX® coil slings!
For technical product information and files please contact our sales department.

