







Webbing Slings




Standard Polyester two layer Webbing Slings with reinforced eyes

- Produced according to the European Standard EN 1492-1
- The Webbing Slings are made of high quality polyester yarns
- Only use the Webbing Slings in a temperature between -40 °C and 100 °C


LIFT-TEX [®] INDUSTRIE		Working load in Kg PES Webbing Slings and Round Slings									
		Straight lifting	Choked lifting	U lifting		Two legged		Three and four legged			
	factor										
				Parallel	0° - 45°	45° - 60°	0° - 45°	45° - 60°	0° - 45°	45° - 60°	
		1	0,8	2	1,4	1	1,4	1	2,1	1,5	
	Webbing width	Working load (WLL)									
color of stitched webbing part	30 mm	1.000	800	2000	1.400	1.000	1.400	1.000	2.100	1.500	
	60 mm	2.000	1.600	4.000	2.800	2.000	2.800	2.000	4.200	3.000	
	90 mm	3.000	2.400	6.000	4.200	3.000	4.200	3.000	6.300	4.500	
	120 mm	4.000	3.200	8.000	5.600	4.000	5.600	4.000	8.400	6.000	
	150 mm	5.000	4.000	10.000	7.000	5.000	7.000	5.000	10.500	7.500	
	180 mm	6.000	4.800	12.000	8.400	6.000	8.400	6.000	12.600	9.000	
	240 mm	8.000	6.400	16.000	11.200	8.000	11.200	8.000	16.800	12.000	
	300 mm	10.000	8.000	20.000	14.000	10.000	14.000	10.000	21.000	15.000	

* We deliver WLL: 500 Kg - 50.000 Kg and Wide: 25 mm. - 1200 mm.


Different lengths can be ordered on request and are available in the following designs:

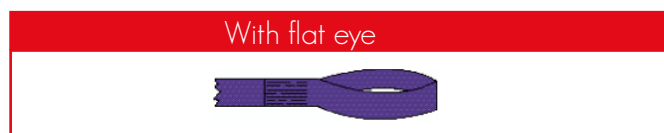

■ Flat eye

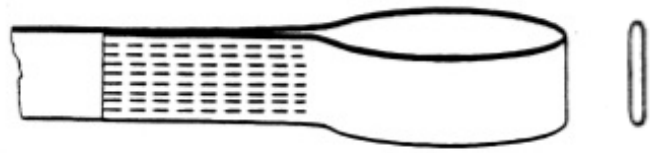


■ Reversed eye



■ Folded eye 1/2 width from one side



■ Folded eye 1/2 width from two sides



■ Folded eye 1/3 width



For more information about these products, please contact our sales department.

Lift-Tex® Industrie b.v. - Feithspark 9-1 - NL-9356 BX Tolbert - The Netherlands
www.lift-tex.nl - sales@lift-tex.nl - +31-(0)594 20 00 10 - +31-(0)594 20 00 19

